



(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.05.2001 Bulletin 2001/21

(51) Int Cl.7: **B65D 90/04**

(21) Application number: 00203658.0

(22) Date of filing: 20.10.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Caretex A/S**
3000 Helsingør (DK)

(72) Inventor: **Thornsen, Hans Erik**
4550 Asaes (DK)

(74) Representative: Elmeros, Claus
Patentgruppen ApS,
Arosgaarden,
Aaboulevariden 23, 5.
8000 Aarhus C (DK)


(30) Priority: 18.11.1999 DK 166299
10.02.2000 US 501454
01.06.2000 US 585034

(54) **Container liner with displacement means for aiding the discharge of the contents of said container liner**

(57) The present invention relates to a liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, said liner comprising top and bottom walls, two side walls and first and second end wall portions, a discharge opening at the lower portion of said first end wall through which the contents of the liner are discharged, displacement means for guiding the contents towards said discharge opening, said displacement means comprising at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said first end wall, and a first essentially triangular or trapezoid portion supporting the outside surface of the floor and a second essentially triangular portion supporting the adjacent side wall portion of the liner, said bag comprising three comers positioned substantively at the edge of the end wall and the side wall portion, the end wall and the bottom wall portion, and the side wall and the bottom wall portion. The flexible bags are preferably attached to the outside surface of the liner by a number of individual double adhesive strips, and the upper comer portion of the flexible bag is provided with a flexible inflation tube for inflation of the flexible bag with pressurised air causing the inflation to advance from the upper portion and downwards in the bag as the amount of material in the liner is reduced.

Since an inflatable bag according to the invention has an essentially triangular shape aligned with the end wall and is attached to the liner along the edge of the side wall and the floor of the liner, the material is not lifted but rather pushed sideways away from the side wall of the corner region of the container. The stress im-

plied in the bag as well as in the liner is thereby reduced considerably.

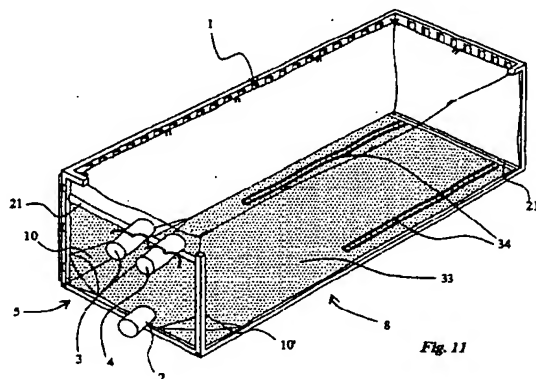

Description

BACKGROUND OF THE INVENTION

1. Technical field

[0001] The present invention relates to the unloading of fluid-like or flowable cargo in a container lined with a container liner. In particular, it relates to a container liner with displacement means for moving the contents of the liner towards a discharge opening in the liner.

2. Background art

[0002] Bulk cargo containers are used for transportation of a variety of products. For some products, it is advantageous to fit the container with a flexible liner of e. g. polyethylene or the like. Powered, granular or other flowable materials can be loaded directly from a storage space, such as a silo or the like and into the liner of the container saving a packaging operation by the manufacturer while also making more efficient use of the container space, as packaging materials, such as bags, pallets, etc. do not have to be transported with the products.

[0003] The product in the container can subsequently be unloaded and transferred directly into a new storage space with the recipient. All in all, the whole handling process is considerably easier and a lot less expensive. The product can be discharged from the container liner by tilting the container whereby the powdered, granular or similarly flowable material flows under gravity towards and out of a discharge opening at the lower end of the container liner.

[0004] However, some of the powdered or granular material is usually trapped in the lower corner regions of the container. In order to move the powdered material towards the discharge, it is known to mount triangular corners, to minimise the likelihood of products accumulating in the corner regions during the discharge operation. An example of such rigid angled corners integrated in a bulkhead is known from US 4,799,607. From US 5,531,361, an active bulkhead is known where tetrahedron-shaped inflatable bags are mounted in the lower corners on each side of the discharge. Similarly, inflatable tetrahedrons mounted inside the container liner are known from US 5,489,037.

[0005] From international patent application No. WO 95/01925, another solution is known. Here, two inflatable bladders are provided at each lower corner region at the discharge end of the liner.

[0006] By these known solutions, the material in the corner regions of the liner is lifted up in the corner region whereby the angle of dip of the material might be exceeded causing the material to slide towards the centre of the container liner. The size of the inflatable corners are relatively restricted due to the design of the corners. Moreover, the lifting of the material in the corners by inflating the corners produces an immense stress in the

walls of the corners as well as the walls of the liner itself. This stress is caused by the air pressure in the inflated corner deriving from the pressurised air source filling the corner as well as the load of the material being lifted.

This means that the material in the liner just outside the area exposed to impact by the inflating liner could form a dip in the liner creating stress in the liner wall as well.

[0007] Such stress can cause the corners or even the liner itself to burst which is unfortunate for obvious reasons as the material is thereby wasted with all the distressing implications associated therewith.

[0008] In the above mentioned US 5,531,361, a vibrating mechanism is installed for vibration of the rigid support surface of the corner lifting the liner corner. Hereby, the flow of the material is eased and the discharge flow is enhanced.

[0009] However such bulkhead designs take up a lot of space in the container whereby the space for storing the products to be transported is reduced.

[0010] It is the object of the invention to provide an improved liner and a method of discharging said liner in such a manner that the above-mentioned drawbacks with the existing liners on the market are avoided.

25 SUMMARY OF THE INVENTION

[0011] This object is achieved by the present invention consisting of a liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, said liner comprising top and bottom walls, two side walls and first and second end wall portions corresponding to the wall portions of the container, a discharge opening at the lower portion of said first end wall, through which the contents of the liner are discharged, displacement means for guiding the content of material towards said discharge opening, said displacement means comprising at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said end first wall, and a first essentially triangular portion supporting the outside surface of the floor and a second essentially triangular portion supporting the adjacent side wall portion of the liner, said triangular bag comprising three corners positioned substantively at the edge of the end wall and the side wall portion, the end wall and the bottom wall portion, and the side wall and the bottom wall portion.

[0012] By the present invention, an inflatable bag is provided that moves the material in the liner sideways towards said discharge opening. An inflatable bag according to the invention has an essentially triangular shape and is aligned with the end wall and is attached to the liner along the edge of the side wall and the floor of the liner. This means that the material is not lifted but pushed sideways away from the side wall of the corner region of the container. The stress implied in the bag as well as in the liner is thereby reduced considerably.

[0013] In particular, the upper corner portion of the flexible bag is provided with a flexible inflation tube for

inflation of the flexible bag with pressurised air causing the inflation to advance from the upper portion and downwards in the bag as the amount of material in the liner is reduced. This means that the pressurised air in the flexible bag distributes itself in the correct manner causing the material to "roll". The upper portion of the material trapped in the corners at any given time is pushed sideways by the progressing inflation of the bag whereby the angle of dip is exceeded and the material slides down towards the discharge opening. The method and design of the liner relieve the material from excessive stress thus eliminating the risk of overloading and bursting the bags and/or the liner itself during the discharge operation.

[0014] In addition, the discharge operation is more efficient since the bags can be designed in considerably larger dimensions without increasing the risk of causing the bag to burst due to excessive internal pressure.

[0015] Moreover, by attaching the triangular flexible bags to the outside surface of the liner by a number of individual double adhesive strips, the liner occupies a minimum of space when folded together and shipped off to the point of use. Also, a liner with flexible corner bags according to the invention can be manufactured in a simple and inexpensive manner. The points of attachment can be chosen in accordance with the desired impact of the inflated bag on the corner region of the liner.

[0016] In a preferred embodiment, the inflatable bag comprises two essentially triangular or trapezoid, flexible sheets secured to each other in a gas-tight manner along the edges forming an interior space that can be increased in volume by inflation with pressurised air. Hereby, the manufacture of the flexible inflatable bags is simple and the production is easily altered to accommodate different sizes of bags. Moreover, the bags hardly occupy any space when deflated.

[0017] In the preferred embodiment, two flexible sheets are of an elastomeric material, preferably polyethylene, polypropylene or the like, said sheets being secured to each other by welding. The inflation tube comprises a first end that is preferably welded to the upper corner portion of the sheets forming the bag, said sheets being provided with a non-adhesive paper sheet prior to their assembly, such as a heat-transporting grease-proof paper sheet, said paper sheet being positioned in the opening of said first end of the inflation tube. The inflation tube is of a tubular plastic material or a similar or of somewhat lighter material than the sheet material of the bags. By this embodiment, the entire welding of the edges can be performed in a plane state and optionally also in a single operation depending on the welding equipment. The paper sheet at the end of the inflation tube prevents closure of the corner towards the interior of the bag. At the same time, the paper sheet only occupies an area inside the tube end. This ensures a gas-tight sealing of the corner region of the bag around the inflation tube. When initial pressurised air is advanced through the inflation tube, the small paper sheet

is blown into the interior of the bag and is thus no obstacle to the inflation operation.

[0018] In a preferred embodiment, the sheets of the flexible bag are of a stronger sheet material than the sheet material of the liner. This is advantageous, in particular with the larger sized flexible inflation bags, as the bags are capable of resisting a large amount internal air pressure. It must be noted that by the term air pressure, it is realised by the invention that any other gas than air can be used for the inflation.

[0019] In a preferred embodiment of the invention, the flexible bag has a height of approx. 40 inches (100 cm), a width of about 44 inches (110 cm) and a length which is at least equal to the height, preferably at least 15 times the height, and between 80 to 120 inches (200 to 300 cm). A standardised bulk cargo container is 8 feet wide and when using two flexible inflation bags, an efficient funnel-like chute leading towards the discharge opening (which typically is about 12" in diameter) can be formed in the floor of the container. The length of the flexible bag can be regulated according to the characteristics of the product to be stored in the container liner and the discharge operation procedure. In particular, by regulating the length and maintaining the height on the flexible bag, the angle of the upper edge can be regulated. The preferred length depends on the tilting angle of the container and the angle of dip of the material. For some granular materials, this angle of "self-slide" is very low and for other granular materials, the angle is high. The steeper the angle the smaller the required relative difference between the height and the length of the flexible bag.

[0020] In the preferred embodiment of the invention, the displacement means comprise two inflatable, flexible bags at each lower corner region of the first end wall on each side of the discharge opening in order to create a funnel-like shape of the discharge region of the liner.

[0021] In one preferred embodiment, the triangular flexible bags are of the same size. This is particularly advantageous when the discharge opening is at the centre of the liner. In an alternative embodiment, the triangular flexible bags are of different sizes so that the flexible bag in the left corner region is larger than the right bag when viewed from the outside. The discharge opening is preferably set off from the centre line of the container liner and is advantageously placed in the right hand side, since it is usually the right-hand door of the two doors of a standard container that opens first. By using two inflatable bags of different sizes, a funnel-like shape can be provided for an off-set discharge opening. An off-set discharge opening can be advantageous, as the discharge of the contents of the liner is possible by opening the right-hand door only. In order to facilitate the discharge operation, the largest inflatable bag is provided with an inflation tube of approx. 30" (150 cm). Hereby, the inflation tube of the left bag which is hidden behind the closed left-hand door is accessible and the left corner flexible bag can be inflated without having to

open the left door.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The invention is described in detail in the following with reference to the accompanying drawings, where

- Fig. 1 is a schematic perspective view of a container liner fitted with two similar sized inflatable bags at the lower corners of the discharge end,
 fig. 2 is the same but with inflatable bags of different sizes,
 fig. 3 is a perspective view of a flexible, inflatable bag in its deflated configuration when attached to the liner,
 fig. 4 is a schematic planar view of said inflatable bag,
 fig. 5 is a cross-sectional view of same,
 figs. 6 and 7 are schematic end views of a liner during the inflation of the flexible bags,
 fig. 8 is a schematic discharge end view of a container with a container liner according to the invention, and
 fig. 9 is a schematic illustration of a section of a container,
 fig. 10 is a schematic planar view of a second embodiment of an inflatable bag according to the invention, and
 fig. 11 is a perspective view of a container liner according to the invention with a flexible bulkhead mounted a container.

DESCRIPTION OF THE DRAWINGS

[0023] In figure 1, a container liner 1 is shown having a discharge opening 2 and two inlet openings 3 and 4 at the end wall 5. The container liner is box-like in shape having two side wall portions 6 and 7, a bottom wall portion, and a second end wall and a top wall portion in addition to the end wall 5.

[0024] At the lower corners of the discharge end 5, two flexible, inflatable bags 10 are provided. The bags are inflated by introducing pressurised air from a pressurised air source (not shown) into the interior of the bags through an inflation tube 12 fitted to each of the bags 10.

[0025] The container liner is designed for fitting on a bulk cargo container and is intended for use in relation to granular, powdered, pellet or other flowable products. For discharge of the container, the container is tilted at a certain discharge angle, e.g. up to 45° so that the discharge end 5 and particularly the discharge opening 2 is essentially the lower part of the container liner 1 and of the container. This causes the product inside the liner

1 to flow out of the discharge opening 2 under gravity. When the liner 1 is practically emptied, some of the material is typically left in the lower corner regions. These are gradually displaced by pushing this material sideways from the respective corners towards the discharge 2 by inflating the respective air bags 10.

[0026] The two bags 10 are of similar size and the discharge opening 2 is positioned in the centre of the container liner 1.

[0027] In figure 2, a liner according to a second preferred embodiment of the invention is shown having two different sized inflatable air bags 10 and 10'. The two inflation tubes 12 and 12' are preferably also of different length.

[0028] The displacement means 10 is shown in its deflated configuration in figures 3 and 4. The displacement means 10 is triangular in its deflated configuration having an essentially upright triangular portion 101 extending along the side wall portions 6 or 7 of the liner 1 and a second triangular portion 102 extending along the floor portion 8 of the liner 1 (see fig. 1 or 2). The flexible bag 10 has a first upper corner 13, a top second corner 14 and a third "floor" corner 15. It has a fold 16 that is substantially parallel with the side edge between the side and the floor wall portions 6, 7 and 8 with the liner 1 (see fig. 1 and 2). The air bag is provided with a number of attachment points 20, preferably made of individual double adhesive strips of tape or the like.

[0029] The air bag comprises two sheets of plastic material, such as polyethylene welded together along the edges whereby a welding seam 11 is provided around the edge portions of the triangular shaped bag 10. This construction is shown in a cross sectional view in figure 5. At the first corner 13, the inflation tube 12 is attached. Due to a previous insertion of a grease-proof paper sheet 19, the welding seam can be made without risking welding the end section of the tube 12 together. By the invention, it is of course realised that any kind of insertion sheet having non-adhesive properties and thus preventing closure of the tube end can be used. As shown in figure 5, the bag 10 is build of two flexible sheets 17 and 18. The welding seam 11 is provided with a gas-tight seal along the edge regions of said sheets 17 and 18. Since the paper sheet 19 is in fact lying loose in the tube end due to its non-sticky properties, the paper 19 is blown into the interior of the bag 10 when pressurised air is applied to the bag 10. This however, has no effect on the functionality of the bag 10.

[0030] In figures 6 and 7, the progression of the inflation of the bag 10 is shown. The flexible bag 10 is supplied with pressurised air through the inflation tube 12 connected to the bag 10 at the upper corner 13 thereof. The bag is filled with air in the upper region since the material in the corner restricts a free flow of air inside the bag 10. As the bag 10 is inflated, the material is gradually pushed sideways towards the discharge 2. As the bag 10 is even more inflated, the amount of material is removed from the corner region, and the air flows more

freely further downwards in the bag 10. In figures 6 and 7, only one inflatable bag 10 is shown in order to show the principle of inflation. However, by the invention it is of course realised that two bags situated at each corner of the discharge end can advantageously be provided.

[0031] In figure 8, a container is shown during discharge. The container can be either a standard 20', 30' or 40' container, since width and height are usually standard measurements. The right hand door 22 of the standard container is opened, whilst the left-hand door remains closed. The discharge opening 2 of end 5 of the liner 1 is placed in the right-hand side of the container liner. The liner 1 is retained by a number of retention bars 21 forming part of the bulkhead. The bulkhead could further comprise a translucent curtain (not shown). This is advantageous, since makes it is possible to visually inspect and follow the process of the discharge operation. The retention bars 21 are suspended from the end side of the container opening.

[0032] As shown in figure 8, both the inflation tubes 12 are available through the right-hand door opening. The bag in the left corner remains behind the closed left door 23 but can nevertheless be inflated through the inflation tube 12. This left inflation tube 12 is longer than the inflation tube of the right inflation bag 10 so that it can easily be operated through the right door opening. As shown in the figure, the bag 10 at the right hand corner is inflated.

[0033] In fig. 9 a corner section 30 of a container is shown. It is lined and the liner is provided with an inflatable bag 10 in the corner. As the bag 10 inflates, a small part of the granular material to be discharged can be trapped between the bag 10 and the side wall 6 or end wall 5 instead of sliding towards the outlet 2. The flexible liner is formed by the material and forms a pocket between the side/end wall 5, 6 and the inflated bag 10 that is rounded in shape when inflated. The zones where this material is most likely to be trapped are located as shown by the references 31 and 32 in fig. 9.

[0034] The amount of material trapped can of course vary depending on the type of material, granular size etc. However, it is found that the phenomenon can be reduced or even eliminated by an inflatable bag 100 according to a second embodiment of the invention, such as shown in fig. 10. Here, the "upright" portion 101 of the bag 100 is extended compared to the first embodiment of fig. 4. This means that the air bag 100 will cause a displacement of the material towards the middle from a "higher" point, and push the material away from the side wall portion at an earlier stage in the discharge process and avoid material from forming a "pocket" in the container liner at the zone 31 of fig. 9. Furthermore, the bag 100 is provided with an extension that can be folded about the fold line 117 so that a section of the inflatable bag 100 will refrain the material from forming a pocket in the zone 32 by the end wall 5.

[0035] As shown in fig. 11, the container liner 1 may be accommodated by a flexible bulkhead 33 made of a

sheet of foil or fabric. In a particular embodiment, the flexible bulkhead 33 is made of reinforced polypropylene, but other materials may also be used. The flexible bulkhead sheet 33 extends through at least the lower portion of the first end wall 5 and at least a substantial part of the bottom wall portion 8, preferably all the way to the edge between the floor and the second wall as shown in fig. 11. The bulkhead sheet 33 has a first end that is secured to a traverse retention bar 21 positioned at the opening in front of the first end wall portion 5 of the liner 1.

[0036] The second end of the flexible bulkhead 33 is secured to a traverse bar 21' at the edge region of the second end wall 6 and the bottom wall 8. In addition, the bulkhead sheet 33 may be secured to the floor of the container by double adhesive tape strips 34. Similarly, the bulkhead 33 may also be secured to the container liner 1 itself by additional double adhesive tape strips 34.

[0037] When the container liner is filled and/or when the material inside the container liner 1 gathers in the discharge region, the bulkhead sheet 33 is stretched. The flexible bulkhead sheet keeps the container liner and its contents from sliding out through the container opening. Hereby, the container liner 1, and in particular the air bags 10, 10', are kept from extending "outwards", i.e. through the container opening. In this way, it is ensured that the expansions of the air bags 10, 10' result almost entirely in traverse movements that, in turn, result in the displacement of the material inside the container liner 1 so the contents are directed towards the discharge opening 2. This flexible bulkhead 33 is particularly advantageous since it is light-weight. Moreover, a flexible bulkhead according to the invention is easy to handle and store. It can be folded or rolled up for storage so only a minimum amount of storage space is required.

[0038] The invention has been described with respect to some preferred embodiments thereof. However, it is understood by those skilled in the art that various changes may be made without departing from the scope of the invention. For instance, the flexible bag can be attached either to the inside or the outside of the liner. Accordingly, the invention is to be limited only as specified in the following claims.

Claims

1. A liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, said liner comprising

top and bottom walls, two side walls and first and second end wall portions,

a discharge opening at the lower portion of said first end wall through which the contents of the liner are discharged,

displacement means for guiding the contents towards said discharge opening,

said displacement means comprising at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said first end wall, and a first essentially triangular portion supporting the outside surface of the floor and a second essentially triangular portion supporting the adjacent side wall portion of the liner,

said bag comprising three corners positioned substantively at the edge of the end wall and the side wall portion, the end wall and the bottom wall portion, and the side wall and the bottom wall portion.

2. A liner, as claimed in claim 1, wherein the first portion is triangular
3. A liner, as claimed in claim 1, wherein the first portion is trapezoid in shape.
4. A liner, as claimed in claim 1, wherein the flexible bags are attached to the outside surface of the liner by a number of individual double adhesive strips.
5. A liner, as claimed in claim 1, wherein the upper corner portion of the flexible bag is provided with a flexible inflation tube for inflation of the flexible bag with pressurised air causing the inflation to advance from the upper portion and downwards in the bag as the amount of material in the liner is reduced.
6. A liner, as claimed in claim 5, wherein the inflatable bag comprises two essentially triangular or trapezoid, flexible sheets, said sheets being secured to each other in a gas-tight manner along the edges forming an interior space that can be increased in volume by inflation with pressurised air.
7. A liner, as claimed in claim 6, wherein the two flexible sheets are of an elastomeric material, preferably polyethylene, polypropylene or the like, said sheets being secured to each other by welding.
8. A liner, as claimed in claim 6, wherein the inflation tube comprises a first end welded to the upper corner portion of the sheets forming the bag and said sheets being provided with a non-adhesive paper sheet prior to assembly, such as a heat-transporting grease-proof paper sheet, said paper sheet being positioned in the opening of said first end of the inflation tube.
9. A liner, as claimed in claim 6, wherein the sheets of the flexible bag are of a stronger sheet material than

the sheet material of the liner.

10. A liner, as claimed in claim 5, wherein the inflation tube has a length of at least approximately 30" (150 cm).
11. A liner, as claimed in claim 5, wherein the flexible bag has a height of approx. 40 inches (100 cm), a width of about 44 inches (110 cm) and a length which is at least equivalent to or larger than the height, preferably at least twice the height, and ideally between 80 to 120 inches (200 to 300 cm).
12. A liner, as claimed in claim 11, wherein the length of the flexible, inflatable bag or bags is chosen according to the angle of dip of the material to be transported in the liner.
13. A liner, as claimed in claim 5, wherein the displacement means comprises two inflatable, flexible bags at each lower corner region of the first end wall on each side of the discharge opening.
14. A liner, as claimed in claim 13, wherein the triangular or trapezoid flexible bags are of similar size.
15. A liner, as claimed in claim 13, wherein the triangular or trapezoid flexible bags are of different sizes so that the flexible bag in the left corner region is larger than the right bag.
16. A liner, as claimed in claim 15, wherein the largest inflatable bag is provided with an inflation tube of approx. 30" (150 cm).
17. A liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, said liner comprising
 top and bottom walls, two side walls and first and second end wall portions corresponding to the wall portions of the container,
 a discharge opening at the lower portion of said first end wall through which the contents of the liner are discharged,
 displacement means for guiding the contents towards said discharge opening,
 said displacement means comprising at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said first end wall, and a first portion supporting the outside surface of the floor and a second essentially triangular portion supporting the adjacent side wall portion of the liner.

18. A transparent liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, said liner comprising

top and bottom walls, two side walls and first and second end wall portions, 5

a discharge opening at the lower portion of said first end wall through which the contents of the liner are discharged, 10

displacement means for guiding the contents of material towards said discharge opening,

said displacement means comprising at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said first end wall, and a first essentially triangular or trapezoid portion supporting the outside surface of the floor and a second essentially triangular portion supporting the adjacent side wall portion of the liner, 15 20

said bag comprising a first upper corner positioned substantively at the edge of the end wall and the side wall portion, a second corner at the edge region of the end wall and the bottom wall portion, and a third corner at the edge region of the side wall and the bottom wall portion, 25 30

a flexible inflation tube provided at the first corner portion of the flexible bag for inflation of the flexible bag with pressurised air causing the inflation to advance from the upper portion and downwards in the bag as the amount of material in the liner is reduced, and 35

a bulkhead comprising a translucent curtain and a number of generally horizontal traverse retention bars secured to the container. 40

19. A bulkhead for a liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, said liner comprising 45

top and bottom walls, two side walls and first and second end wall portions,

a discharge opening at the lower portion of said first end wall through which the contents of the liner are discharged, 50

displacement means for guiding the contents towards said discharge opening,

said displacement means comprising at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said first end wall, and a first essentially triangular portion supporting the outside surface of the floor and a second essentially trian- 55

gular portion supporting the adjacent side wall portion of the liner,

said bag comprising three corners positioned substantively at the edge of the end wall and the side wall portion, the end wall and the bottom wall portion, and the side wall and the bottom wall portion,



the bulkhead being a flexible sheet of foil or fabric, said flexible sheet extending through at least the lower portion of the first end wall and at least a substantial part of the bottom wall portion, said flexible sheet having a first end that is secured to a traverse retention bar at the first end wall portion and a second end that is secured to a traverse bar at the second end wall or the bottom wall.

20. A method of discharge of a flexible container liner for use in a box-like cargo container for transportation of powder, granular or other flowable products, comprising a discharge end, said method comprising the steps of

tilting the container causing the material within the liner to flow towards and through a discharge opening at the lower portion of said first end wall through which the contents of the liner are discharged,

displacing the material in the lower corner regions of the box-like liner for guiding it sideways towards said discharge opening by inflating at least one inflatable, flexible bag having an essentially triangular or trapezoid shape substantively abutting said first end wall, and a generally triangular portion supporting the outside surface of the floor and the adjacent side wall portion of the liner, where said at least one bag comprises three corners positioned substantively at the edge of the end wall and the side wall portion, the end wall and the bottom wall portion, and the side wall and the bottom wall portion, so that the bag initially inflates above the amount of material left in the container and thereby causes the upper layer of the material at any given time to slide downwards towards the discharge opening.

21. A method, as claimed in claim 20, wherein the bag gradually displaces the material trapped in the corner region of the liner sideways during unloading thereof away from the side wall and towards the discharge opening as it is being inflated.

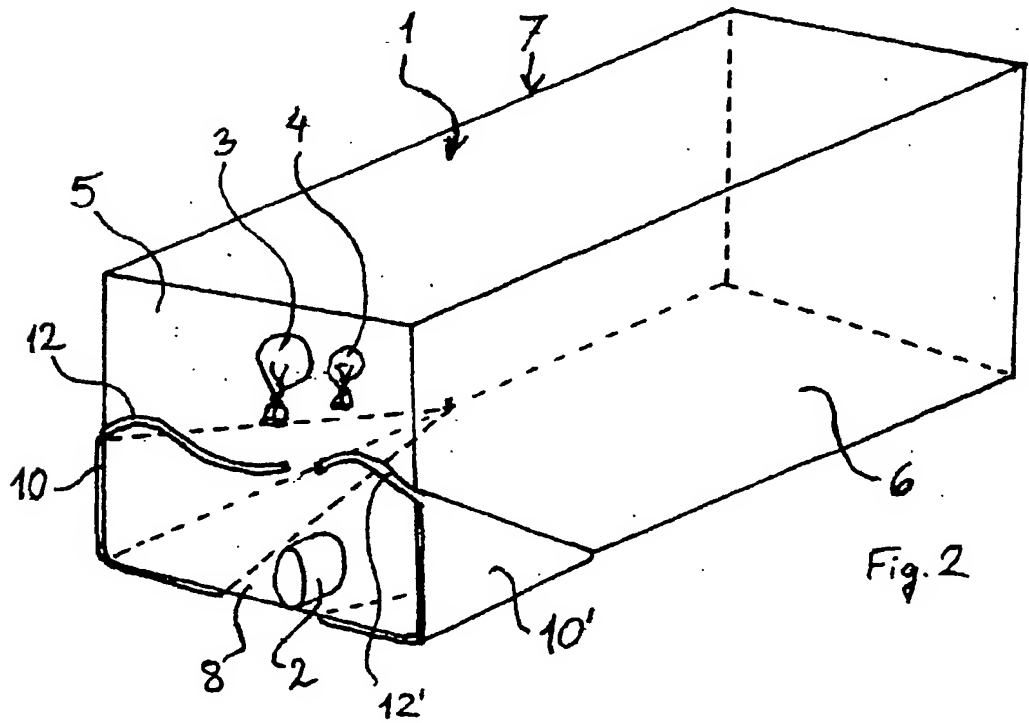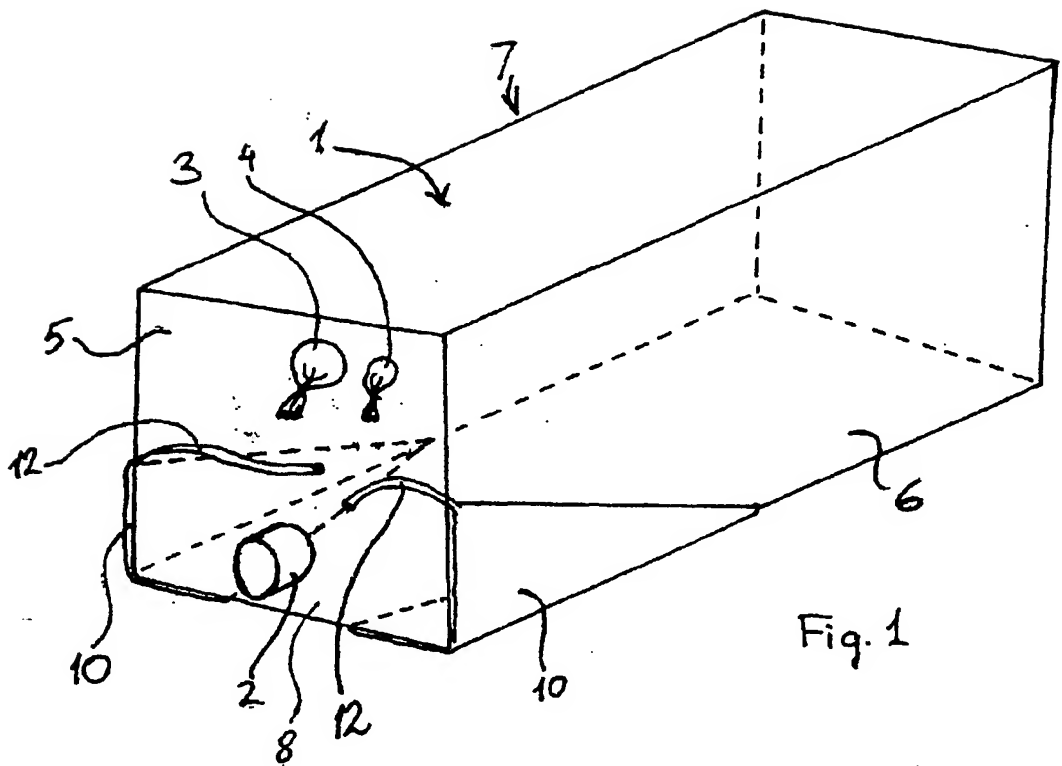

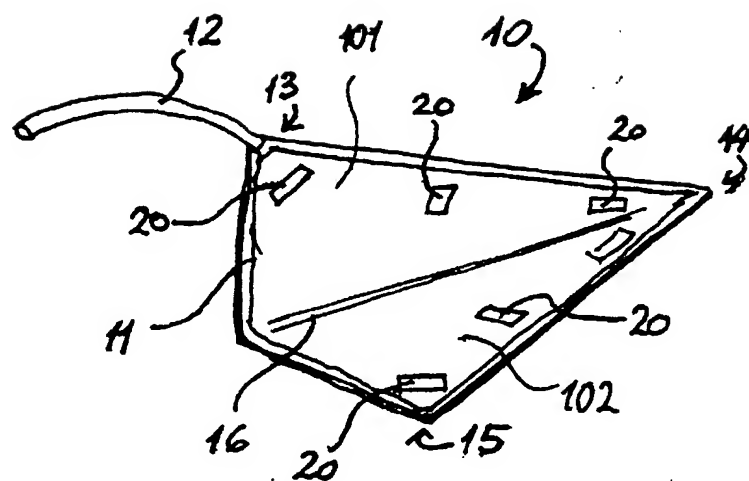


Fig. 3

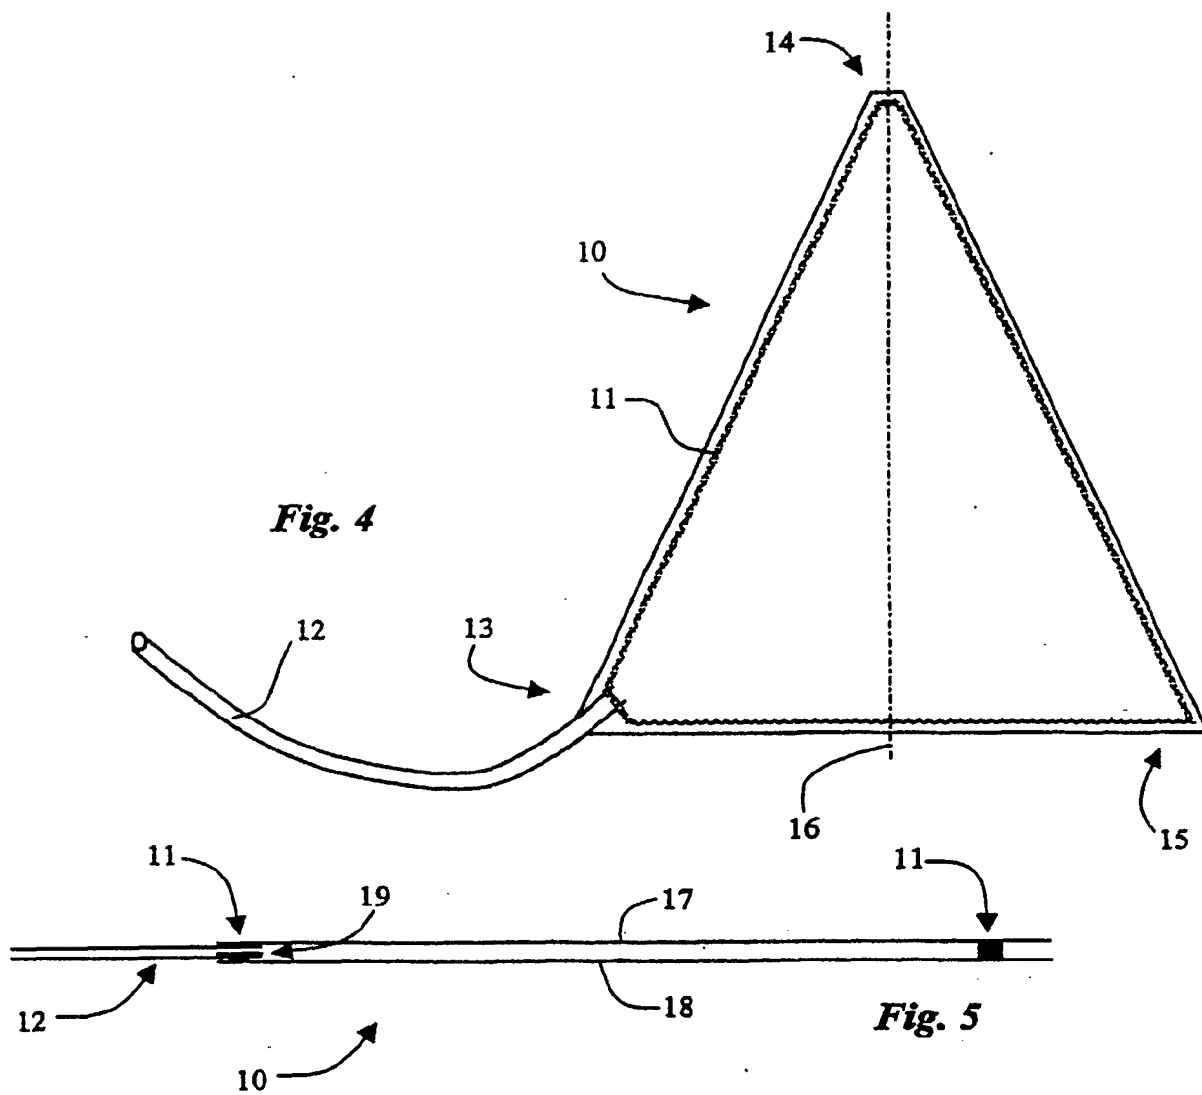


Fig. 6

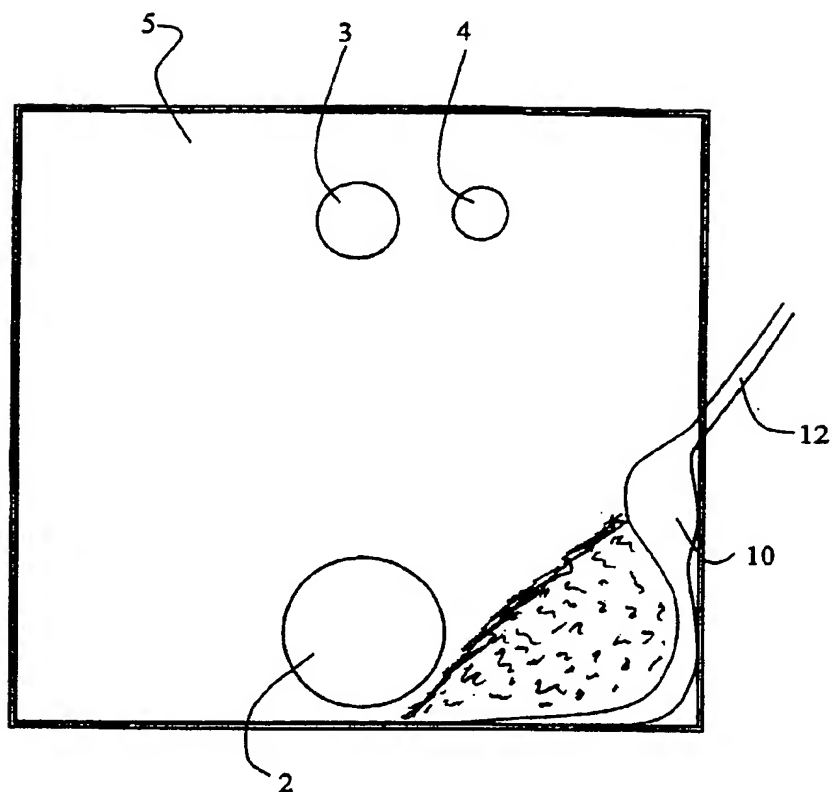
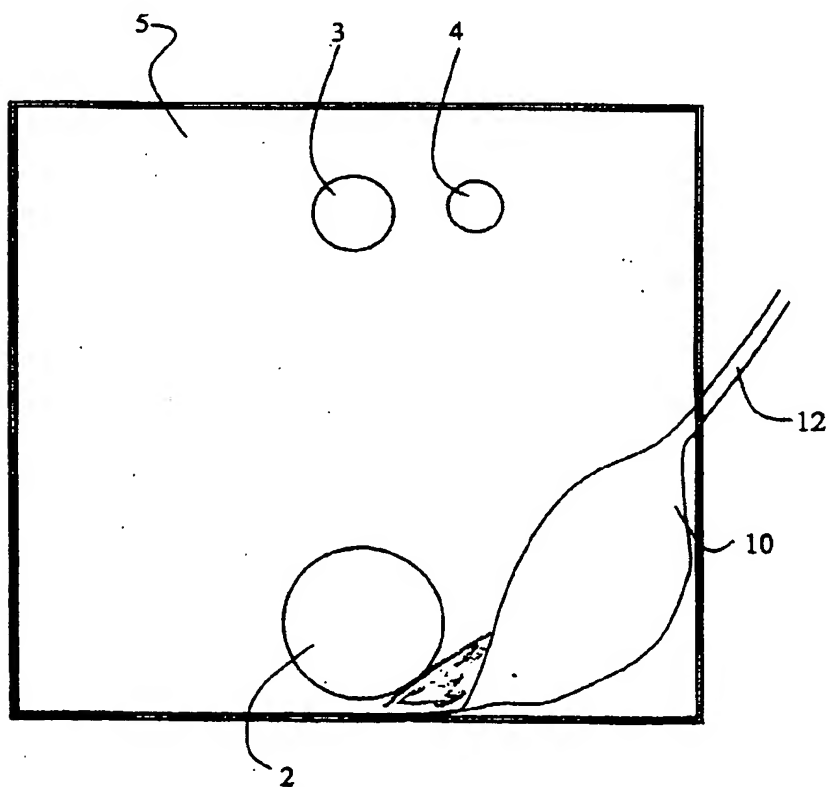


Fig. 7



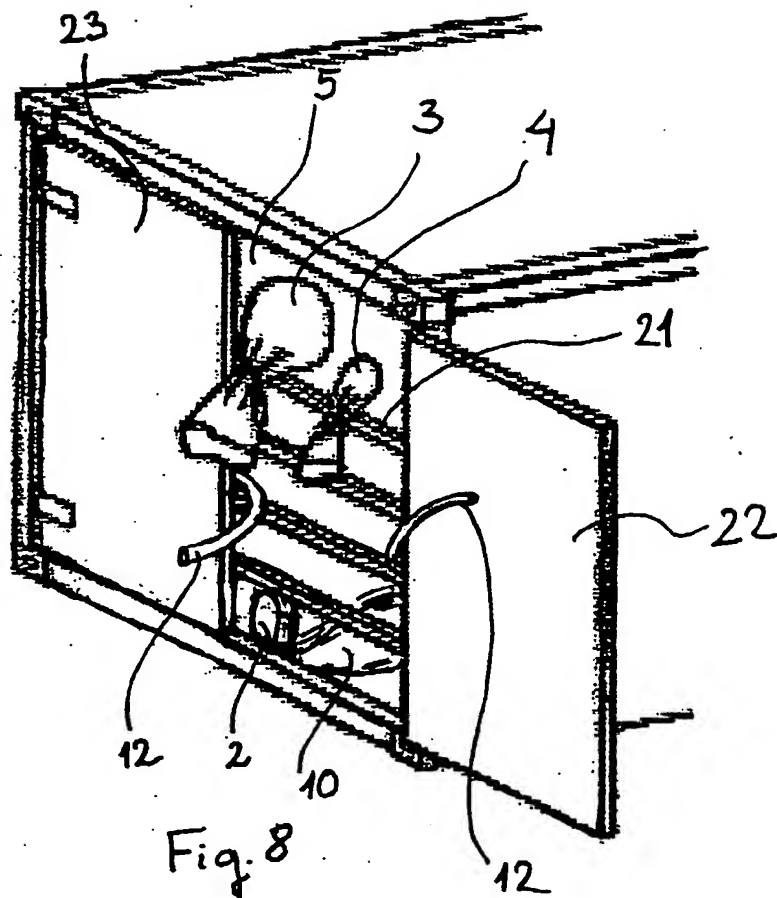
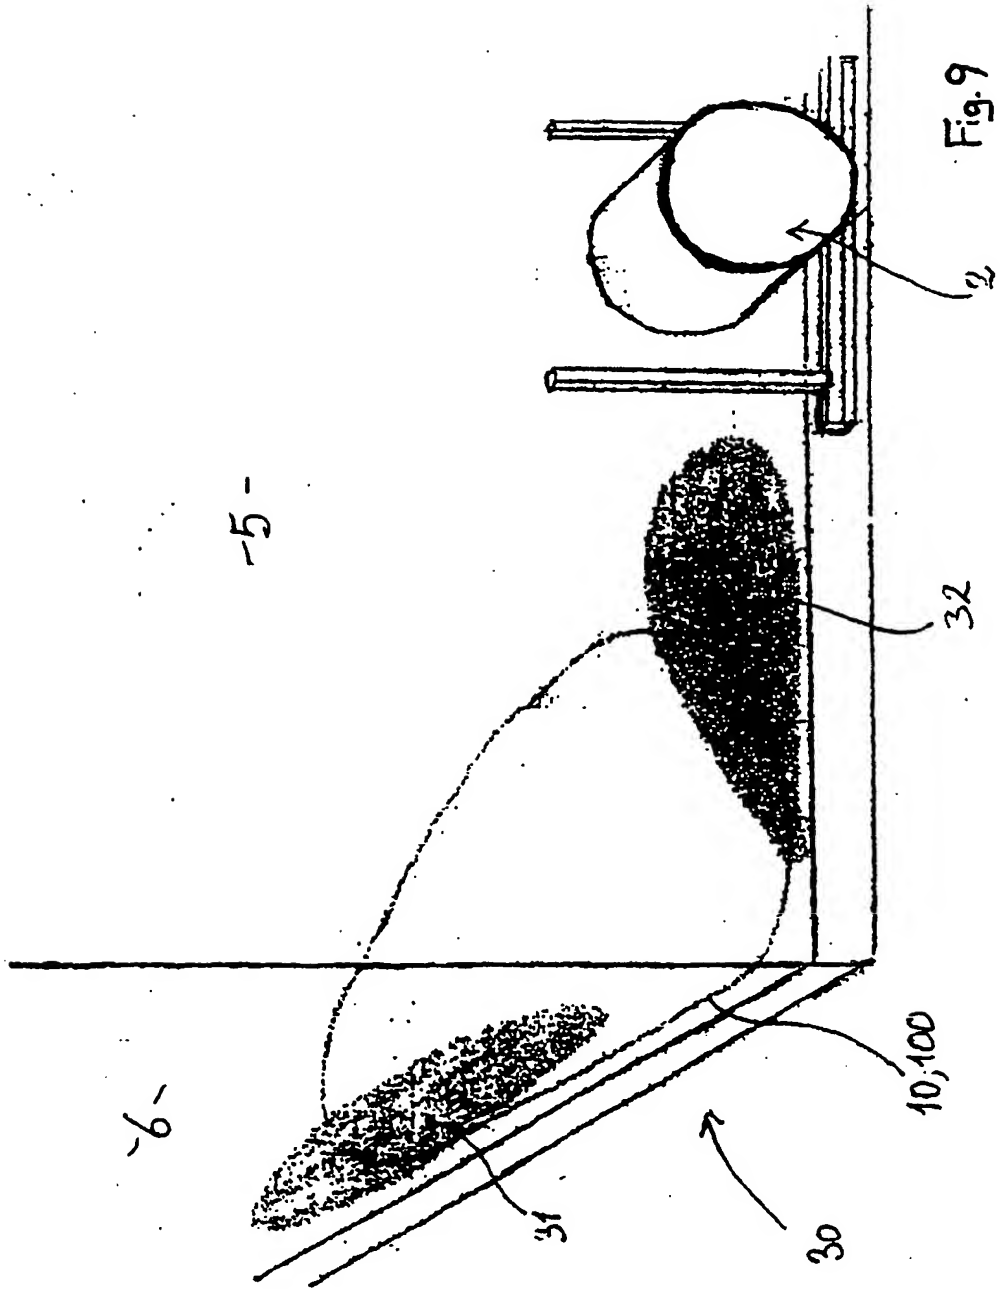
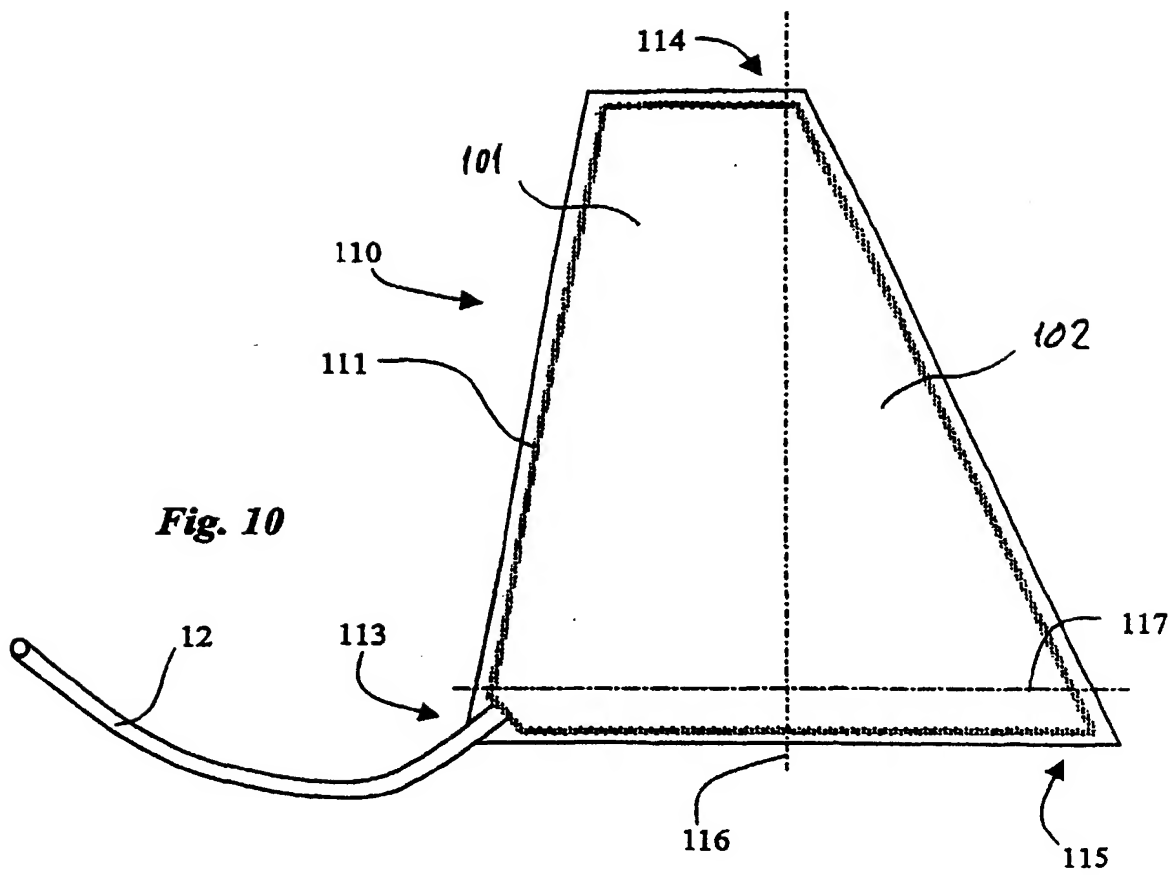


Fig. 8





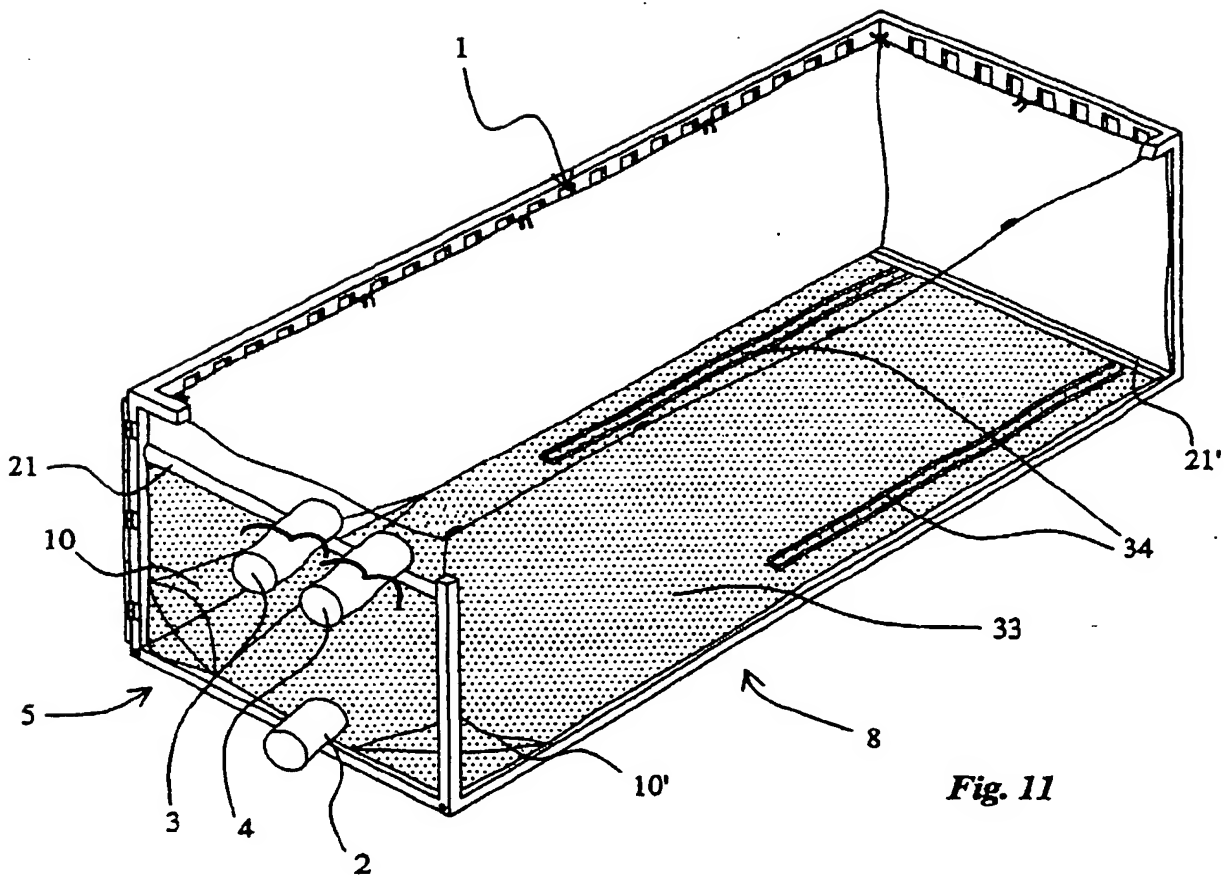


Fig. 11



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 3658

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,A	US 5 489 037 A (STOPPER RAYMOND J) 6 February 1996 (1996-02-06) * the whole document * -----	1-21	B65D90/04
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B65D
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 February 2001	Examiner Ostyn, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background D : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

This Page Blank (uspto)